





## CRACKED OR BROKEN FRONT BRUSH MOUNT PLATE

TOOLS REQUIRED: INCLUDED WRENCH & SCREW DRIVER | PARTS REQUIRED: MOUNT PLATE

### STEPS FOR REPLACEMENT

1. Lift the front brush arm of the side that is being replaced.
2. Using the screwdriver, unscrew (3) front brush **(A)** from plate (skip this step if the brush is not installed).
3. Use wrench to loosen and remove bolt **(B)** holding the plate mount in place.

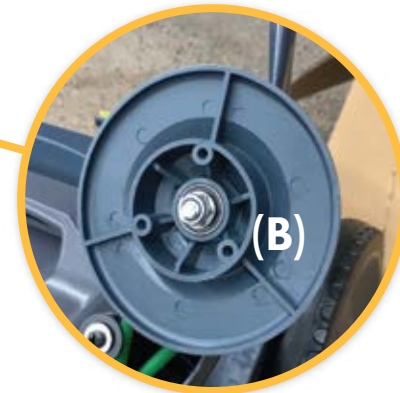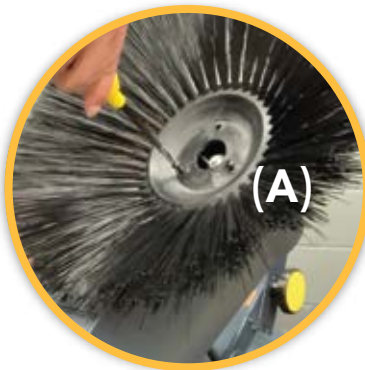



## TOOLS REQUIRED



WRENCH



SCREWDRIVER

## STEPS FOR REPLACEMENT CONTINUED

4. Remove the nut, washer and bolt while being careful to keep the green belt **(C)** in place.
5. Remove broken part. Mount new mount plate.
6. Slide bolt back into place and, using the wrench, secure in place with washer and nut.
7. Install front brush **(D)**.

